

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 January 2001 (04.01.2001)

PCT

(10) International Publication Number
WO 01/00952 A1

(51) International Patent Classification⁷: E05B 65/08

IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(21) International Application Number: PCT/GR00/00023

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 28 June 2000 (28.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
990100218 28 June 1999 (28.06.1999) GR

Published:


- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

(71) Applicant and
(72) Inventor: LEONTARIDIS, Athanasios [GR/GR]; Vosporou 61, GR-171 24 Nea Smirni, Athens (GR).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOCK ASSEMBLY FOR SLIDING DOOR/WINDOW PANELS

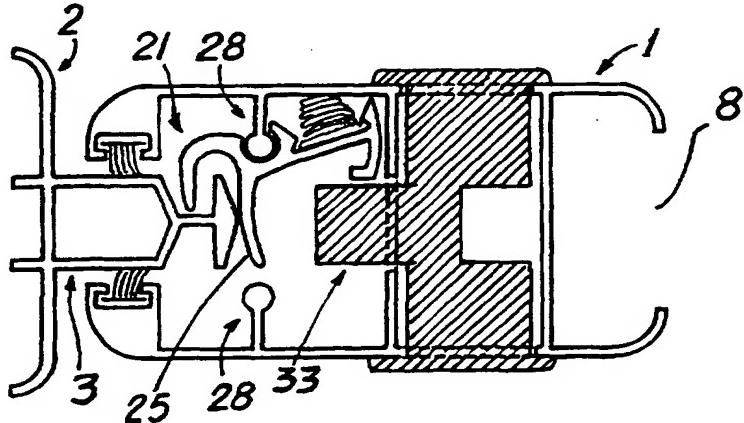

(57) Abstract: A lock is described for sliding aluminium door or window panels, wherein are used discrete hooking and locking mechanisms. The hooking mechanism comprises an oblong hook profile (21) which rotates automatically in a hooking or unhooking position into a vertically extending frame profile (1) which bears a respective recession shaping, as the sliding door/window panel is simply pulled in the opening or shutting direction, respectively. The locking mechanism operates so that, when being controlled by the user, it is set in a position for capturing the hooking mechanism in the hooking position, by capturing the immobilisation arm

WO 01/00952 A1

of the above mentioned, otherwise freely and automatically rotating, oblong hook profile (21).